


## ELECTRONIC HOMESTYLE

# COMMERCIAL REAR CONTROL SINGLE DRYER - CANADA

### Built for Reliable Performance

Speed Queen® single load dryers are durably constructed using premium materials for long-lasting, reliable performance and superior wash results. If you want your laundry done right, you want a Speed Queen. Our machines are manufactured using metal instead of plastic. They're built with rugged, commercial-grade construction and pushed beyond their limit in our state-of-the-art test lab, ensuring unmatched durability. Our world-class test lab rigorously pushes our products far beyond the conditions they're likely to ever face. We work hard at every point of our manufacturing process to ensure that our machines reflect that belief.

- Industry's largest door opening 1914 cm<sup>2</sup> (2.06 sq. ft.)
- Door is reversible for installation flexibility
- High efficiency exhaust blower with superior airflow 105 liters/sec (220 cfm)
- 100% serviceable from the front
- Space-saving narrow cabinet 683 mm (26-7/8")
- Upfront lint filter easy to clean and secured
- Durable galvanized steel cylinder
- Extra-large capacity

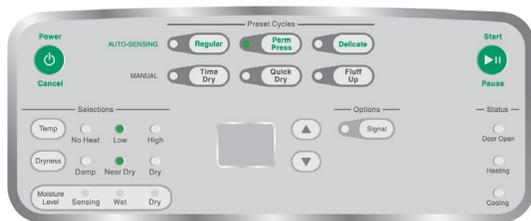


Electronic homestyle control is designed for durability and easy operation with attractive selection buttons and cycle status indicator lights.

SPECIFICATIONS

# COMMERCIAL REAR CONTROL SINGLE DRYER - CANADA

MODEL - see below for all models and activation available	
CONTROL OPTION	Electronic Homestyle
COLOR	White
CAPACITY - kg (lb)	8.2 (18)
CYLINDER VOLUME - liters (cu. ft.)	198 (7.0)
MOTOR (CAPACITOR START AND THERMAL PROTECTED)	.33 HP
TYPE OF GAS (GAS MODELS ONLY)	Factory equipped natural/mixed gas
AIR OUTLET DIAMETER - mm (in)	102 (4)
EXHAUST AIRFLOW - cfm (liters/sec)	105 (220)
AVAILABLE CYCLES	Regular, Delicate, Perm Press, Time Dry, Quick Dry, Fluff Up
ELECTRICAL REQUIREMENTS	Electric 120/240/60/1-30 amp 120/208/60/1-30 amp
	Gas 120/60/1-15 amp
HEATING ELEMENT	Electric 5350W, 240V 4750W, 208Va
	Gas 25,000 Btu
NET WEIGHT - kg (lb)	57.2 (126)
SHIPPING WEIGHT - kg (lb)	61.7 (136)
SHIPPING DIMENSIONS APPROX. - mm (in)	Width 775 (30.5)
	Depth 762 (29.5)
	Height 1143 (45)
AGENCY APPROVALS	Electric cULus
	Gas cCSAus

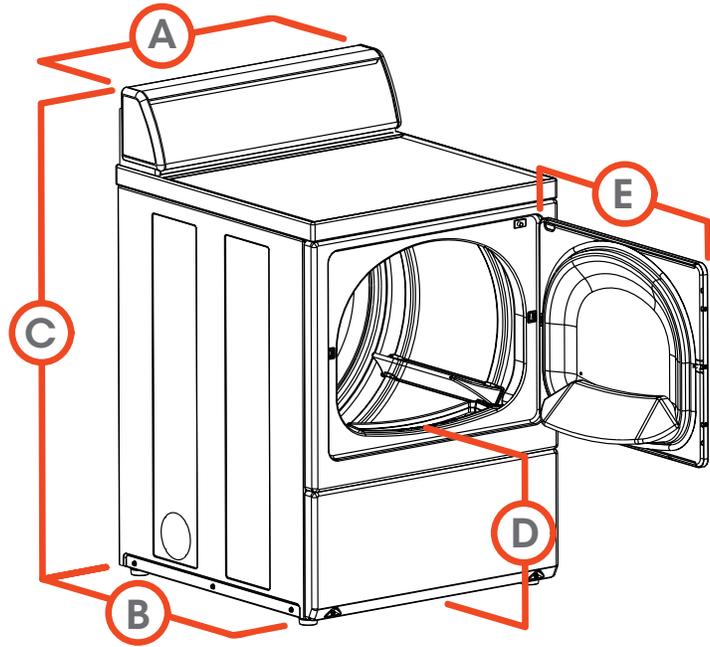

A. OVERALL WIDTH - mm (in)	683 (26.875)
B. OVERALL DEPTH - mm (in)	711 (28)
C. OVERALL HEIGHT - mm (in)	1092 (43)
D. FLOOR TO DOOR OPENING - mm (in)	392 (15.44)
E. DOOR SWING - mm (in)	597 (23.5)

MODELS	VOLTAGE/FREQ/PH	ACTIVATION
LDEE7RGS173CW01	120/240/60/1	Electric
LDEE7RGS153CW01	120/208/60/1	Electric
LDGE7RGS113CW01	120/60/1	Gas



Electric dryers come equipped for 240/60/1 operation. They can be field converted to operate on 208/60/1 with optional 61928 conversion kit. Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.