

SPEED QUEEN MULTI-HOUSING

ELECTRONIC HOMESTYLE

COMMERCIAL FRONT LOAD FRONT CONTROL WASHER

Built for Reliable Performance

Engineered and built like no other, the Speed Queen front load washer is designed to be everything people thought a washer couldn't be, beginning with its revolutionary suspension and sensing technology. This groundbreaking innovation manages and redistributes out-of-balance loads to deliver uninterrupted cycles, virtually eliminate vibration and operate so quietly neighboring residents won't even know it's running. It also touts an incredible 440 G-Force extraction speed to maximize moisture removal, reduce dry times and minimize utility costs. And as if that's not game-changing enough, this smooth-running, laundry-optimizing machine delivers increased water efficiency and a redesigned, 10-degree tilted control panel for easier readability and the ultimate user experience. It's everything you never knew it could be.

- Revolutionary balancing technology
- Industry leading 1200 RPM spin speed exerts 440 G-force extraction
- Extra-wide 15.5" door opening and 180° door swing
- Rugged suspension system
- Easy-to-read digital display
- Durable stainless steel tub
- Four-compartment soap dispenser



ENERGY STAR® Certified




Electronic homestyle control is designed for durability and easy operation with attractive selection buttons and cycle status indicator lights.

SPECIFICATIONS


COMMERCIAL FRONT LOAD FRONT CONTROL WASHER

MODEL - see below for all models and activation available		
CONTROL OPTION	Electronic Homestyle	
COLOR	White	
CAPACITY - kg (lb)	21.5 (9.5)	
OVERALL WIDTH - mm (in)	683 (26 7/8)	
OVERALL DEPTH - mm (in)	704 (27 3/4)	
OVERALL HEIGHT - mm (in)	1027 (40 7/16)	
CYLINDER VOLUME - liters (cu. ft.)	92.3 (3.26)	
SPIN SPEED G-FORCE (RPM)	440 (1200)	
MOTOR SIZE - KW (HP)	0.67 (0.9)	
WATER CONSUMPTION PER CYCLE - liter (g)	44.3 (11.7)	
WF (WATER FACTOR) - liters/liter/cycle (gal/ft³)	0.50 (3.7)	
MEF (Modified Energy Factor) Liters/kWh/cycle (ft³/kWh/cycle)	82.29 (2.38)	
AVAILABLE WATER TEMPERATURES	Hot, Warm, Cold	
AVAILABLE CYCLES	Heavy Duty, Normal Eco, Perm Press Delicate, Rinse & Spin, Spin Only	
WATER PRESSURE - PSI (Bar)	1.4/8.3 (20-120)	
DRAIN	Pump	
CYLINDER FINISH	Stainless Steel	
NET WEIGHT - kg (lb)	113 (250)	
SHIPPING WEIGHT - kg (lb)	122 (270)	
SHIPPING DIMENSIONS APPROX. - mm (in)	Width	737 (29)
	Depth	832 (32 3/4)
	Height	1156 (45 1/2)

MODELS	VOLTAGE/FREQ/PH	
LFNE5BSP113CW01	120/60/1	Gas
LFNE5BJP113CW01 with injection	120/60/1	Gas

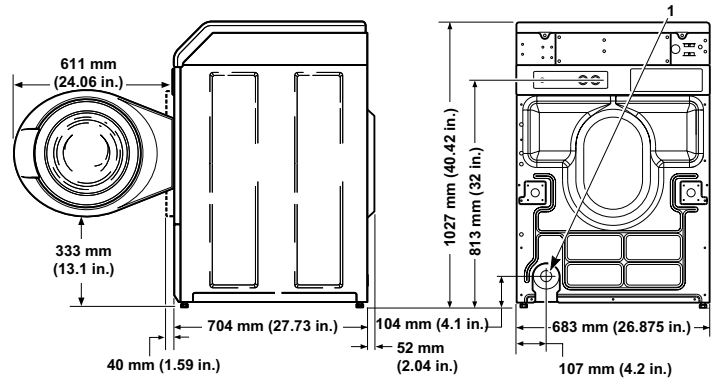

Models With Gravity Drain
 1. 38 mm (1.5 in.) Inside Diameter; 47 mm (1.86 in.) Outside Diameter



For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.