

## ELECTRONIC HOMESTYLE

# COMMERCIAL STACK WASHER/DRYER

### Built for Reliable Performance

Speed Queen's stack washer/dryer brings an innovative stacked concept that takes up half the floor space that a conventional washer and dryer does when situated side by side. The freestanding softmount design can be installed on all floor types or levels. Both washer and dryer have the same hookups and connections as a standard washer and dryer. No additional plumbing or electrical change is needed. Speed Queen's stack washer/dryer combines heavy-duty construction with reliable operation proven to stand the test of time. They're designed with less moving parts for one reason: so you'll face fewer maintenance problems and less wear and tear down the road. Front load products have met every design standard to be 100% ADA compliant.

- Integrated meter case
- Large capacity coin boxes standard
- Wash Alert™ with Service Alert capable

#### WASHER

- Rugged suspension system
- Industry leading 1200 RPM spin speed exerts 440 g-force extraction
- Durable stainless steel washtub
- Four-compartment soap dispenser
- Extra-wide 15.5" door opening and 180° door swing

#### DRYER

- Upfront lint filter easy to clean and secured
- Industry's largest door opening 1914 cm<sup>2</sup> (2.06 sq. ft.)
- Quiet, efficient blower system



Electronic homestyle control is designed for durability and easy operation with attractive selection buttons and cycle status indicator lights.




SPECIFICATIONS


# COMMERCIAL STACK WASHER/DRYER

MODEL - see below for all models and activation available	
CONTROL OPTION	Electronic Homestyle
COLOR	White
CAPACITY - kg (lb)	Washer 9.5 (21.5) Dryer 8.2 (18)
OVERALL WIDTH - mm (in)	683 (26 7/8)
OVERALL DEPTH - mm (in)	711 (28)
OVERALL HEIGHT - mm (in)	1986 (78 3/16)
CYLINDER VOLUME liters (cu. ft.)	Washer 96.8 (3.42) Dryer 198 (7.0)
MOTOR SIZE - kw (HP)	0.67 (0.9)
TYPE OF GAS (GAS MODELS ONLY)	Factory equipped natural/mixed gas
WATER CONSUMPTION PER CYCLE - liter (g)	44.3 (11.7)
WF (WATER FACTOR) - liters/liter/cycle (gal/ft <sup>3</sup> )	0.52 (3.8)
MEF (Modified Energy Factor) Liters/kWh/cycle (ft <sup>3</sup> /kWh/cycle)	84.48 (2.98)
AVAILABLE WATER TEMPERATURES	Hot, Warm, Cold
AVAILABLE CYCLES	Washer Heavy Duty, Normal Eco, Perm Press, Delicate, Rinse and Spin Dryer Regular, Perm Press, Delicate, Time Dry, Quick Dry, Fluff Up
AIR OUTLET DIAMETER - mm (in)	102 (4)
EXHAUST AIRFLOW CFM - mm (in)	105 (220)
ELECTRICAL REQUIREMENTS	* Electric 120/240/60/1-40 amp Gas 120/60/1-20 amp
HEATING ELEMENT	Electric 5350W, 240V Gas 25,000 Btu
SHIPPING DIMENSIONS APPROX. - mm (in)	Width 737 (29) Depth 832 (32 3/4) Height 2032 (80)
NET WEIGHT - kg (lb)	177 (390)
SHIPPING WEIGHT kg (lb)	193 (425)
AGENCY APPROVALS	Electric cULus Gas cCSAus

MODELS	VOLTAGE/FREQ/PH	
LTEE5ASP283CW01	120/240/60/1	Electric
LTGE5ASP093CW01	120/60/1	Gas

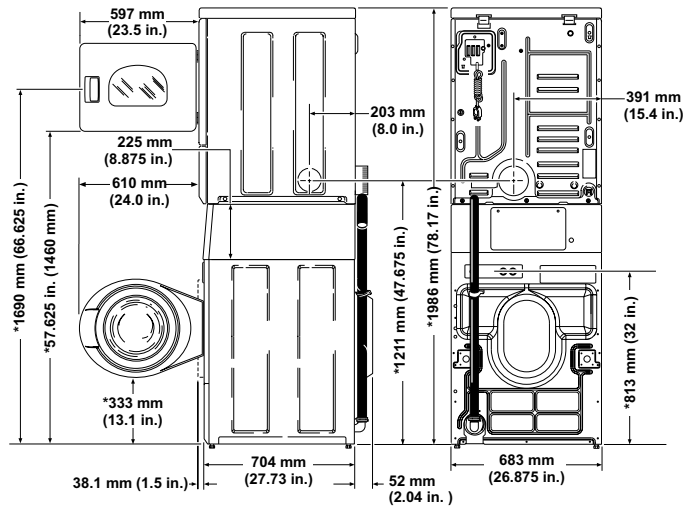

\*With leveling legs turned into base.  
NOTE: Exhaust openings are 10.2 mm (4 inch) metal ducting.

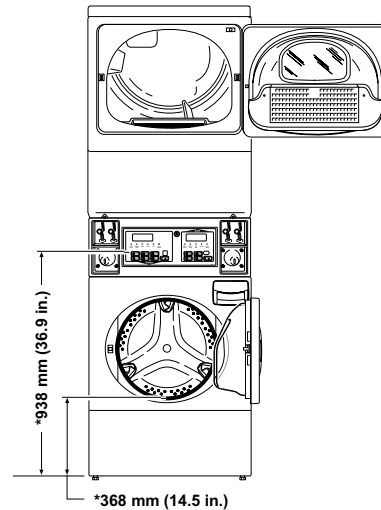

\* Electric dryers come equipped for 240/60/1 operation. They can be field converted to operate on 208/60/1 with optional 61928 conversion kit. Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.