



COMMERCIAL DRYER

Huebsch® has designed commercial dryers that offer the benefits of heavy-duty commercial quality with the attractive styling of homestyle dryers. With features like extra-large capacity and a no-hassle lint filter, Huebsch commercial laundry dryers allow you to focus on your day-to-day operations instead of your laundry.

FAST DRYING TIMES

Huebsch dryers deliver fast drying results. A 7.0 cu. ft. cylinder with an 18 lb capacity offers ample space for large loads to tumble and produce fast drying times, while lowering utility consumption.

EASY MAINTENANCE

A secured lint filter is located upfront to allow for easy cleaning between cycles.

LARGE, RUGGED DOOR

Our dryer has a rugged door and hinge with the industry's largest door opening, 2.06 sq. ft. The doors are also reversible for installation flexibility.


UNMATCHED DURABILITY

Our commercial dryer is manufactured at our Ripon, WI headquarters. The entire machine receives Huebsch's standard three-year warranty. In addition, Huebsch has more service representatives in the field than most brands have in their whole organization.

*Parts only, labor not included. See Huebsch Warranty Bond for specifics.



ELECTRONIC HOMESTYLE CONTROL

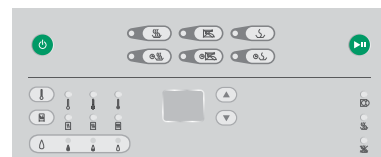

The Electronic Homestyle Control features a time-remaining display, six preset cycle buttons, cycle adjustability, cycle indicator lights and moisture level indicator lights.


COMMERCIAL DRYER

| Specifications | Front Control | Rear Control |
|---|--|--|
| Available Controls | Electronic Homestyle | Electronic Homestyle Emech |
| Models | Electric YDEE5BGS173CW01 | YDEE7RGS173CW01 YDEE7RGS153CW01 |
| | Gas YDGE5BGS113CW01 | YDGE7RGS113CW01 |
| Capacity - lb (kg) | 18 (8.2) | 18 (8.2) |
| Cylinder Volume - cu. Ft. (liters) | 7.0 (198) | 7.0 (198) |
| Width - in (mm) | 26.875 (683) | 26.875 (683) |
| Depth - in (mm) | 28 (711) | 28 (711) |
| Height - in (mm) | 40 7/16 (1027) | 43 (1092) |
| Motor Size - HP (kw) | 0.33 (0.25) | 0.33 (0.25) |
| Available Heat Sources | Electric or Gas | Electric or Gas |
| Available Heating Element (Electric W) | 4750 @ 208V 5350 @ 240V | 4750 @ 208V 5350 @ 240V |
| Gas Inlet Connection - in (mm) | 3/8 (9.5) | 3/8 (9.5) |
| Gas Consumption - BTU/Hr | 22,500 | 22,500 |
| Exhaust Outlet Diameter - in (mm) | 4 (102) | 4 (102) |
| Exhaust Airflow - cfm (liters/sec) | 220 (105) | 220 (105) |
| Available Cycles* | Regular, Perm Press, Delicate, Time Dry, Quick Dry, Fluff Up | Regular, Perm Press, Delicate, Time Dry, Quick Dry, Fluff Up |
| Cycle Indicator Lights | Yes | Yes |
| Cylinder Finish | Galvanized | Galvanized |
| Available Colors | White | White |
| Door Type (Solid/Window) | Solid | Solid |
| Available Electrical Requirements - (Voltage/Hz/Ph) | Electric: 120/240/60/1 - 30 Amp Electric: 120/208/60/1 - 30 Amp Gas: 120/60/1 - 15 Amp | Electric: 120/240/60/1 - 30 Amp Electric: 120/208/60/1 - 30 Amp Gas: 120/60/1 - 15 Amp |
| Net Weight - lb (kg) | Elec/Gas 145/150 (66/68) | Elec/Gas 130/135 (59/61) |
| Shipping Weight - lb (kg) | Elec/Gas 155/160 (70/73) | Elec/Gas 140/145 (64/66) |
| Shipping Width - in (mm) | 29 (737) | 29 (737) |
| Shipping Depth - in (mm) | 32.75 (832) | 32.75 (832) |
| Shipping Height - in (mm) | 45.5 (1156) | 45.5 (1156) |
| Available Agency Approvals | Elec: ^C UL _{US} , Gas: ^C CSA _{US} | Elec: ^C UL _{US} , Gas: ^C CSA _{US} |

* Information shown applies to highest end control available
 Note: Not all options are available for all models. Twelfth digit in model number indicates US or Canadian unit. C=Canada & T=US.
 Refer to the price list for the available models and options.
 ADA Compliant

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.

©Copyright 2018 Alliance Laundry Systems LLC

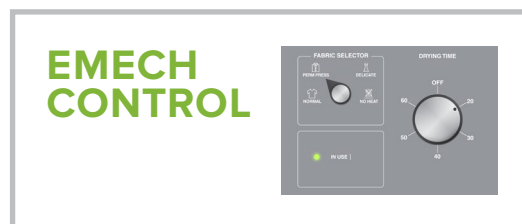

AH18-0033